

SPEC for Mass Production

Spec No.	TQ3C-8EAF0-E1YAA384-00
Date	September 4, 2024

TYPE : TCG070WVLEDN-AN30

< 7.0 inch WVGA transmissive color TFT with LED backlight
and constant current circuit for LED backlight>

CONTENTS

1. Application
2. Construction and outline
3. Mechanical specifications
4. Absolute maximum ratings
5. Electrical characteristics
6. Optical characteristics
7. Interface signals
8. Input timing characteristics
9. Lot number identification
10. Warranty
11. Precautions for use
12. Reliability test data
13. Outline drawing



KYOCERA CORPORATION

This specification is subject to change without notice.
Consult Kyocera before ordering.

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.
	Prepared	Checked	Approved	Approved
September 4, 2024	<i>Y. Yamazaki</i>	<i>T. Fukui</i>	<i>M. Kato</i>	<i>T. Sawada</i>

Warning

1. This Kyocera LCD module has been specifically designed for use only in electronic devices and industrial machines in the area of audio control, office automation, industrial control, home appliances, etc. The module should not be used in applications where the highest level of safety and reliability are required and module failure or malfunction of such module results in physical harm or loss of life, as well as enormous damage or loss. Such fields of applications include, without limitation, medical, aerospace, communications infrastructure, atomic energy control. Kyocera expressly disclaims any and all liability resulting in any way to the use of the module in such applications.
2. Customer agrees to indemnify, defend and hold Kyocera harmless from and against any and all actions, claims, damages, liabilities, awards, costs, and expenses, including legal expenses, resulting from or arising out of Customer's use, or sale for use, or Kyocera modules in applications.

Caution

1. Kyocera shall have the right, which Customer hereby acknowledges, to immediately scrap or destroy tooling for Kyocera modules for which no Purchase Orders have been received from the Customer in a two-year period.
2. Please note that we may not be able to respond to new environmental regulations after receiving the final mass production order for this product.

Spec No. TQ3C-8EAF0-E1YAA384-00	Part No. TCG070WVLDEDNN-AN30	Page -
------------------------------------	---------------------------------	-----------

Revision record

Date		Designed by : Engineering dept.			Confirmed by : QA dept.
		Prepared	Checked	Approved	Approved
Rev. No.	Date	Page	Descriptions		

1. Application

This document defines the specification of TCG070WVLDEDNN-AN30. (RoHS Compliant)

2. Construction and outline

LCD	: Transmissive color dot matrix type TFT
Backlight system	: LED
Polarizer	: Anti-Glare treatment
Interface	: LVDS
Additional circuit	: Timing controller, Power supply (3.3V input) With Constant current circuit for LED Backlight (12V input)

3. Mechanical specifications

Item	Specification	Unit
Outline dimensions 1)	165(W)×(104.4)(H)×8.6(D)	mm
Active area	152.4(W)×91.44(H) (17.8cm/7.0 inch(Diagonal))	mm
Dot format	800×(R,G,B)(W)×480(H)	dot
Dot pitch	0.0635(W)×0.1905(H)	mm
Base color 2)	Normally White	-
Mass	210	g

1) Projection not included. Please refer to outline for details.

2) Due to the characteristics of the LCD material, the color varies with environmental temperature.

4. Absolute maximum ratings

4-1. Electrical absolute maximum ratings

Item		Symbol	Min.	Max.	Unit
Supply voltage(+3.3V)		V _{DD}	-0.3	4.0	V
Supply voltage(+12V)		V _{IN}	-0.3	14.0	V
Input signal voltage 1)	RxINi+, RxINi- (i=0,1,2,3)	V _{I1}	-0.3	2.8	V
	CK IN+, CK IN-	V _{I2}	-0.3	2.8	V
	SELLVDS, BITSEL, SC	V _{I3}	-0.3	V _{DD} +0.5	V
	BLBRT, BLEN	V _{I4}	-0.3	V _{IN}	V

- 1) V_{DD} must be supplied correctly within the range described in 5-1.

4-2. Environmental absolute maximum ratings

Item	Symbol	Min.	Max.	Unit
Operating temperature 1)	T _{OP}	-20	70	°C
Storage temperature 2)	T _{STO}	-30	80	°C
Operating humidity 3)	H _{OP}	10	4)	%RH
Storage humidity 3)	H _{STO}	10	4)	%RH
Vibration	-	5)	5)	-
Shock	-	6)	6)	-

- 1) Operating temperature means a temperature which operation shall be guaranteed. Since display performance is evaluated at 25°C, another temperature range should be confirmed.

- 2) Ta (Ambient Temperature) = -30°C < 48h, Ta = 80°C < 168h

Store LCD at normal temperature/humidity. Keep them free from vibration and shock.

An LCD that is kept at a low or a high temperature for a long time can be defective due to other conditions, even if the low or high temperature satisfies the standard.

(Please refer to "Precautions for Use" for details.)

- 3) Non-condensing

- 4) Ta ≤ 40°C, 85%RH Max.

Ta > 40°C, Absolute humidity shall be less than 85%RH at 40°C.

- 5)

Frequency	10~55 Hz	Acceleration value (0.3~9 m/s ²)
Vibration width	0.15mm	
Interval	10-55-10 Hz	1 minute

2 hours in each direction X, Y, Z (6 hours total)

EIAJ ED-2531

- 6) Acceleration: 490 m/s², Pulse width: 11 ms

3 times in each direction: ±X, ±Y, ±Z

EIAJ ED-2531


5. Electrical characteristics

5-1. LCD

Ta = -20~70°C


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage 1)	V _{DD}	-	3.0	3.3	3.6	V
Current consumption	I _{DD}	2)	-	200	260	mA
Permissive input ripple voltage	V _{RP}	V _{DD} =3.3V	-	-	100	mVp-p
Input signal voltage 3)	V _{IL}	"Low" level	0	-	0.8	V
	V _{IH}	"High" level	2.0	-	V _{DD}	V
Input leak current	I _{OL}	V _{I3} =0V	-10	-	10	μA
	I _{OH}	V _{I3} =3.3V	-	-	400	μA
LVDS Input voltage 4)	V _L	-	0	-	1.9	V
Differential input voltage 4)	V _{ID}	-	100	-	600	mV
Differential input threshold voltage 4) 5)	V _{TL}	"Low" level	V _{CM} -100	-	-	mV
	V _{TH}	"High" level	-	-	V _{CM} +100	mV
Terminator	R ₁	-	-	100	-	Ω
V _{DD} -turn-on conditions 1) 6)	t1	-	0.1	-	10	ms
	t2	-	0	-	-	ms
	t3	-	0	-	-	ms
	t4	-	1.0	-	-	s
	t5	-	200	-	-	ms
	t6	-	200	-	-	ms
	t7	-	0	-	10	s
	t8	-	0	-	-	ms

1) V_{DD}-turn-on conditions

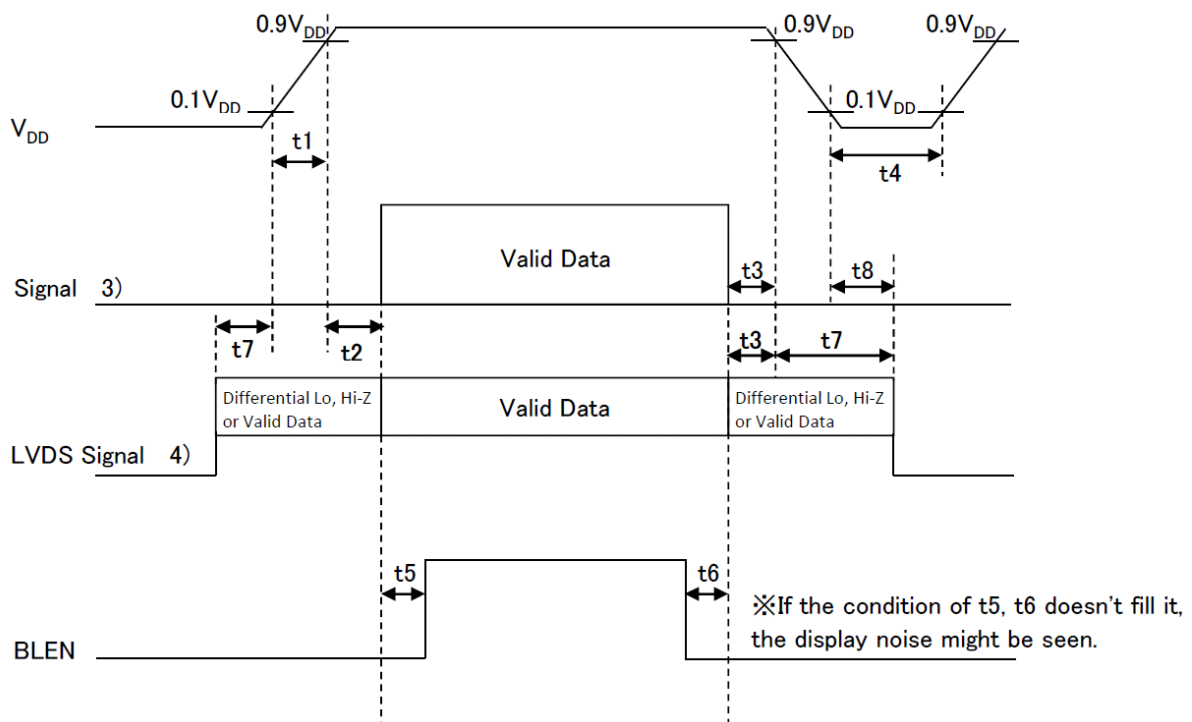


2) Display pattern:

$V_{DD} = 3.3V$, $T_a = 25^\circ C$

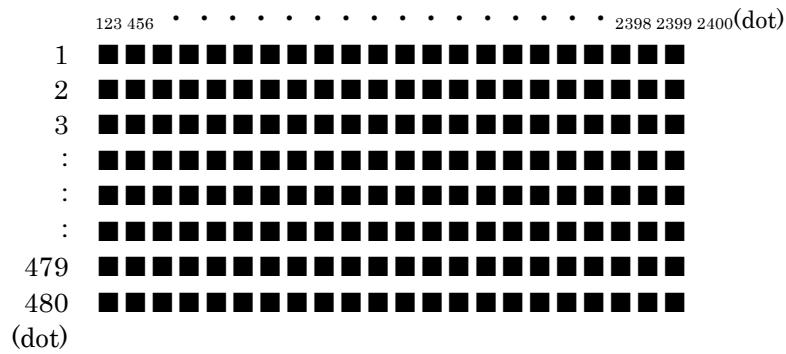

3) Input signal: SELLVDS, BITSEL, SC

4) Input signal: RxIN3+, RxIN3-, RxIN2+, RxIN2-, RxIN1+, RxIN1-, RxIN0+, RxIN0-, CK IN+, CK IN-

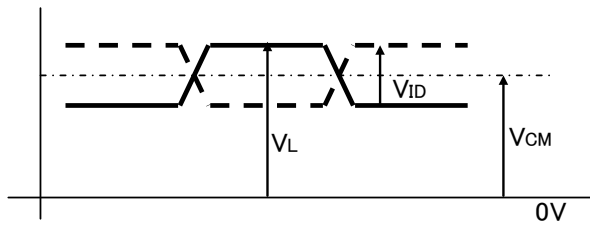

5) V_{CM} : LVDS Common mode voltage ($V_{CM}=1.25V$)


6) Please power on LVDS transmitter at the same time as VDD, or LVDS transmitter should be powered on first.

5-2. Constant current circuit for LED Backlight

Ta = -20~70°C


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage 1)	V _{IN}	-	10.8	12.0	13.2	V
Current consumption	I _{IN}	2)	-	235	400	mA
Permissive input ripple voltage	V _{RP_BL}	V _{IN} =12.0V	-	-	100	mVp-p
BLBRT Input signal voltage	V _{IL_BLBRT}	"Low" level	0	-	0.8	V
	V _{IH_BLBRT}	"High" level	2.3	-	V _{IN}	V
BLBRT Input pull-down resistance	R _{IN_BLBRT}	-	100	300	500	kΩ
BLEN Input signal voltage	V _{IL_BLEN}	"Low" level	0	-	0.8	V
	V _{IH_BLEN}	"High" level	2.3	-	V _{IN}	V
BLEN Input pull-down resistance	R _{IN_BLEN}	-	100	300	500	kΩ
PWM Frequency 3)	f _{PWM}	-	200	-	10k	Hz
PMM Duty ratio 3)	D _{PWM}	f _{PWM} =200Hz	1	-	100	%
		f _{PWM} =2kHz	10	-	100	%
		f _{PWM} =10kHz	50	-	100	%
Operating life time 4) 5)	T	Temp.=25°C	-	100,000	-	h

1) V_{IN}-turn-on conditions

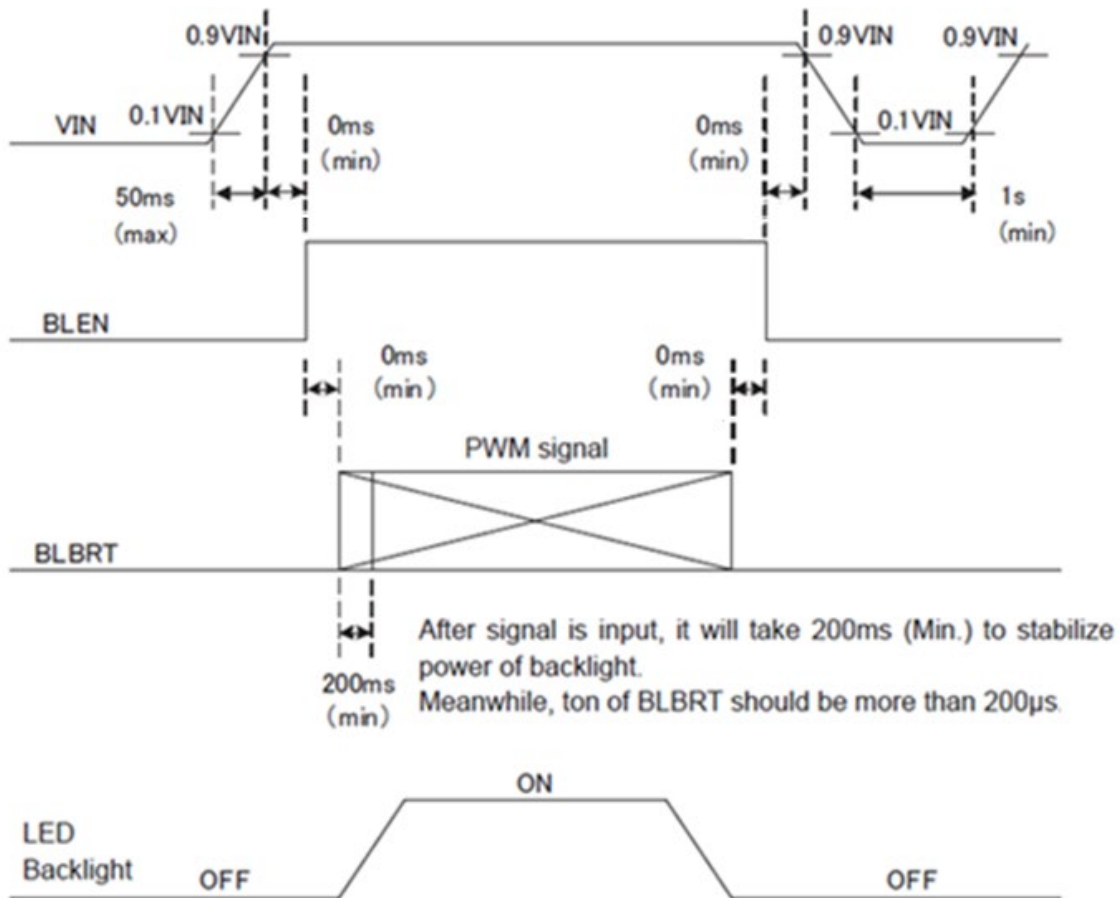

2) V_{IN} = 12V, Ta = 25°C, D_{PWM} = 100%

3) PWM timing diagram

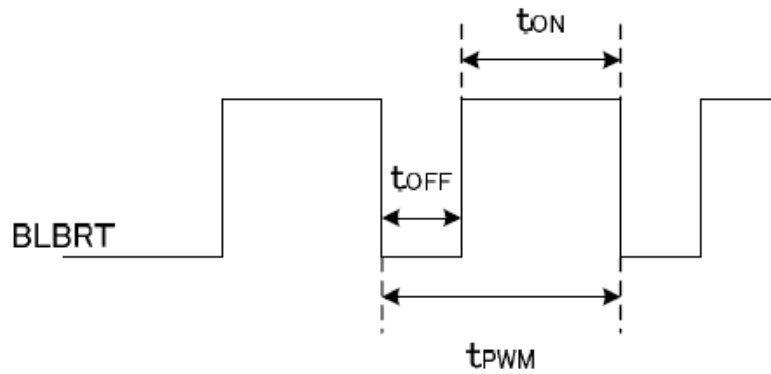

Please do not set t_{OFF} with $0 \mu s < t_{OFF} < 1 \mu s$.

In case of lower frequency, the deterioration of the display quality, flicker etc., may occur.

- 4) When brightness decrease 50% of minimum brightness.
The average life of a LED will decrease when the LCD is operating at higher temperatures.
- 5) Life time is estimated data. (Condition: $D_{PWM} = 100\%$, Temp. $= 25^{\circ}C$ in chamber).

6. Optical characteristics


Measuring spot = ϕ 6.0mm, Ta = 25°C

Item		Symbol	Condition	Min.	Typ.	Max.	Unit
Response time	Rise	τ_{r}	$\theta = \phi = 0^{\circ}$	-	5	-	ms
	Down	τ_{d}	$\theta = \phi = 0^{\circ}$	-	25	-	ms
Viewing angle range View direction : 12 o'clock (Gray inversion)		θ_{UPPER}	$\text{CR} \geq 10$	-	60	-	deg.
		θ_{LOWER}		-	80	-	
		ϕ_{LEFT}		-	80	-	deg.
		ϕ_{RIGHT}		-	80	-	
Contrast ratio		CR	$\theta = \phi = 0^{\circ}$	700	1000	-	-
Brightness		L	$\text{D}_{\text{PWM}} = 100\%$	490	700	-	cd/m ²
Chromaticity coordinates	Red	x	$\theta = \phi = 0^{\circ}$	0.550	0.600	0.650	-
		y		0.300	0.350	0.400	
	Green	x	$\theta = \phi = 0^{\circ}$	0.270	0.320	0.370	
		y		0.500	0.550	0.600	
	Blue	x	$\theta = \phi = 0^{\circ}$	0.100	0.150	0.200	
		y		0.070	0.120	0.170	
	White	x	$\theta = \phi = 0^{\circ}$	0.240	0.290	0.340	
		y		0.255	0.305	0.355	


6-1. Definition of contrast ratio

$$CR(\text{Contrast ratio}) = \frac{\text{Brightness with all pixels "White"}}{\text{Brightness with all pixels "Black"}}$$


6-2. Definition of response time

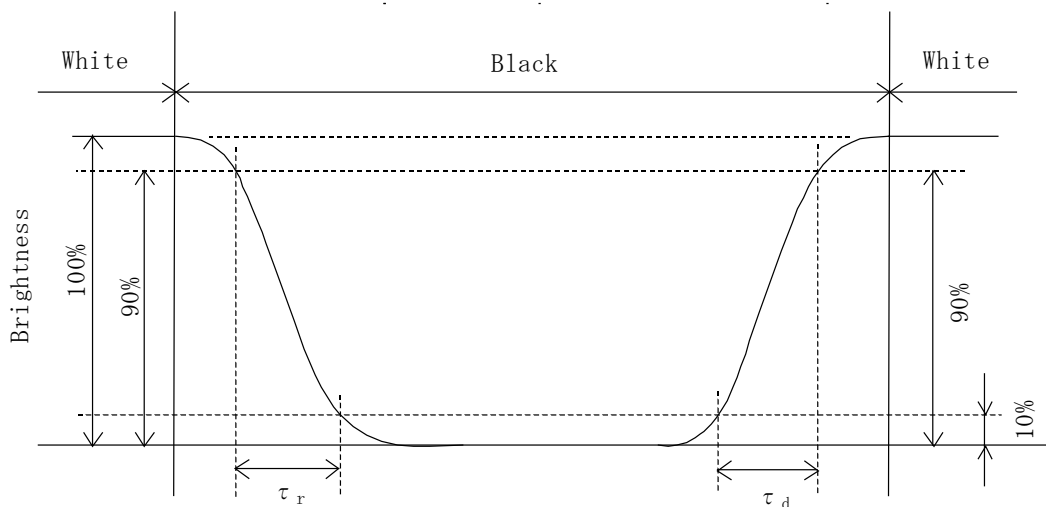

6-3. Definition of viewing angle

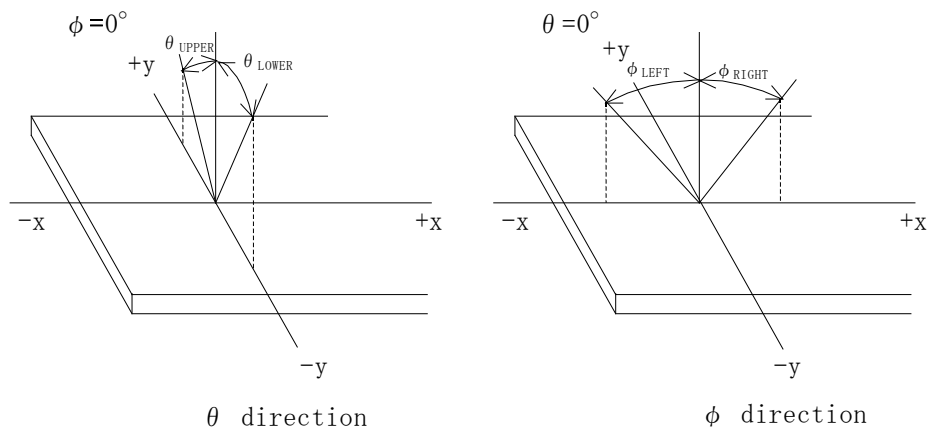

6-4. Brightness measuring point

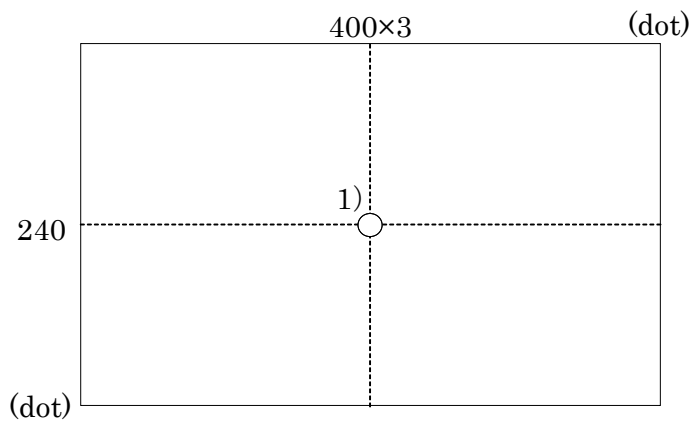

- 1) Rating is defined as the white brightness at center of display screen.
- 2) 5 minutes after LED is turned on. ($T_a = 25^\circ\text{C}$)

7. Interface signals

7-1. LCD

No.	Symbol	Description	Note
1	BITSEL	Bit data select signal(GND or Open: 8bit mode、 High: 6bit mode)	
2	SELLVDS	Mode select signal(LVDS Data mapping)	
3	GND	GND	
4	GND	GND	
5	RxIN3+	LVDS receiver signal CH3(+)	LVDS
6	RxIN3-	LVDS receiver signal CH3(-)	LVDS
7	GND	GND	
8	CK IN+	LVDS receiver signal CK(+)	LVDS
9	CK IN-	LVDS receiver signal CK(-)	LVDS
10	GND	GND	
11	RxIN2+	LVDS receiver signal CH2(+)	LVDS
12	RxIN2-	LVDS receiver signal CH2(-)	LVDS
13	GND	GND	
14	RxIN1+	LVDS receiver signal CH1(+)	LVDS
15	RxIN1-	LVDS receiver signal CH1(-)	LVDS
16	GND	GND	
17	RxIN0+	LVDS receiver signal CH0(+)	LVDS
18	RxIN0-	LVDS receiver signal CH0(-)	LVDS
19	GND	GND	
20	GND	GND	
21	V _{DD}	+3.3V power supply	
22	V _{DD}	+3.3V power supply	
23	SC	Scan direction control(High or Open: Normal、 GND: Reverse)	1)
24	BLBRT	PWM signal(Brightness adjustment)	
25	BLN	ON/OFF terminal voltage	
26	NC	NC	
27	V _{IN}	+12V power supply	
28	V _{IN}	+12V power supply	
29	GNDB	GND (Backlight)	
30	GNDB	GND (Backlight)	

LCD connector : FI-X30SSLA-HF (JAE)

*This connector has 32pins and pin No.1 and No.32 connect to GND.

Above interface signal table specifies 30pins assigned from pin No.2 to No.31.


Matching connector : FI-X30HL (JAE)
FI-X30C-NPB (JAE)

LVDS receiver : Embedded in ASIC


Matching LVDS transmitter : THC63LVDM83D(Thine Electronics) or compatible

1) Scan direction

SC : High or Open



SC : GND




7-2. Data mapping (6bit input / 8bit mode)

1) Location of BITSEL, SELLVDS (THC63LVDM83D (THine Electronics) or compatible)

Transmitter		1Pin BITSEL = "L" or OPEN 2Pin SELLVDS = "L" or OPEN	1Pin BITSEL = "L" or OPEN 2Pin SELLVDS = "H"
Pin No.	Data		
51	TA0	—	R0(LSB)
52	TA1	—	R1
54	TA2	—	R2
55	TA3	—	R3
56	TA4	—	R4
3	TA5	—	R5(MSB)
4	TA6	—	G0(LSB)
6	TB0	—	G1
7	TB1	—	G2
11	TB2	—	G3
12	TB3	—	G4
14	TB4	—	G5(MSB)
15	TB5	—	B0(LSB)
19	TB6	—	B1
20	TC0	—	B2
22	TC1	—	B3
23	TC2	—	B4
24	TC3	—	B5(MSB)
27	TC4	—	(HS)
28	TC5	—	(VS)
30	TC6	—	DE
50	TD0	—	GND
2	TD1	—	GND
8	TD2	—	GND
10	TD3	—	GND
16	TD4	—	GND
18	TD5	—	GND
25	TD6	—	GND


BITSEL=L(GND) or OPEN
SELLVDS=H(3.3V)

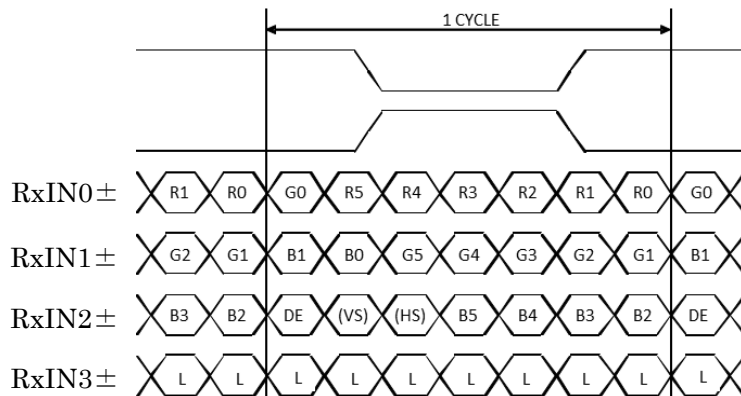

DE : DATA ENABLE
HS : H_{SYNC}
VS : V_{SYNC}

2) Block diagram


BITSEL=L(GND) or OPEN
SELLVDS=H(3.3V)

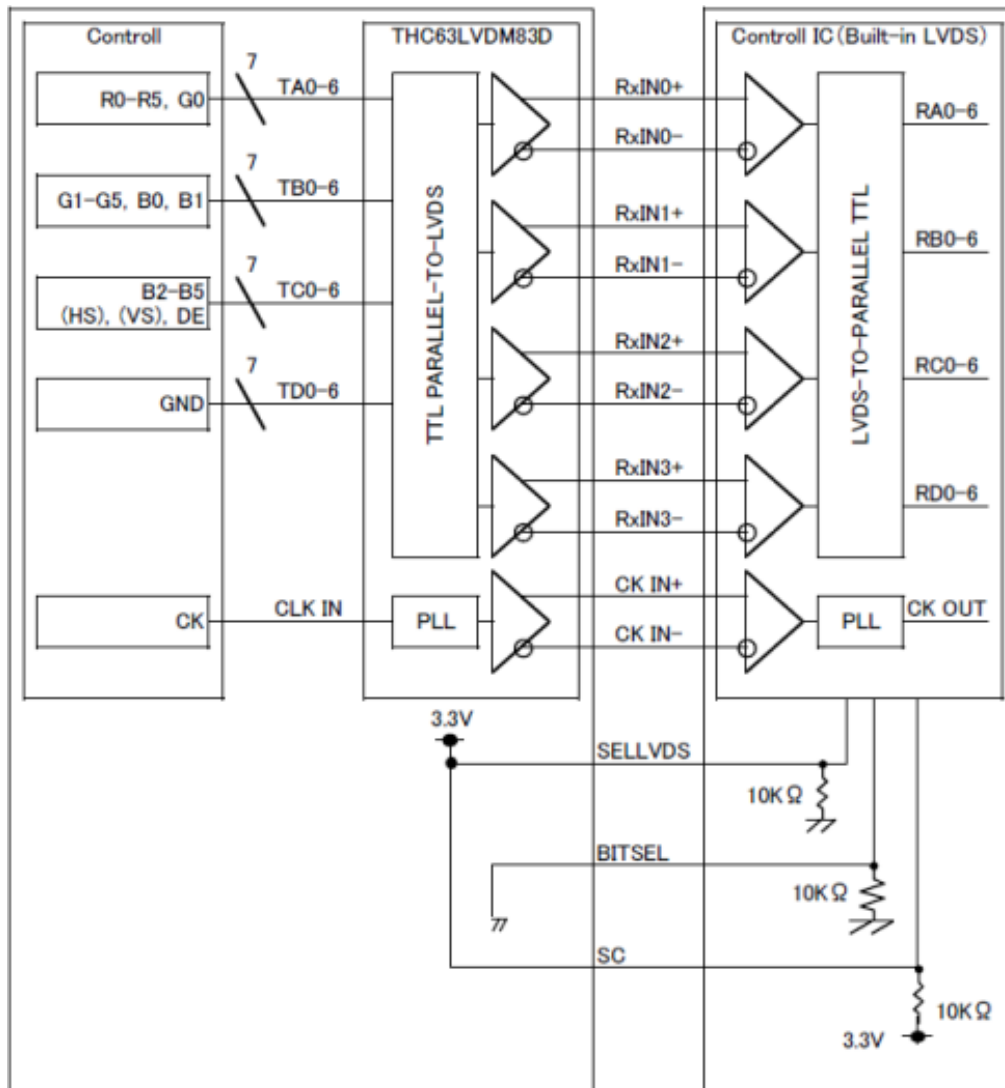

*SELLVDS and BITSEL signal lines have 10 k Ω pull-down resistor.

*SC signal line has 10 k Ω pull-up resistor.

When using “6-bit Transmitter”, please connect the unused channel of the control IC receiver as described in the diagram below.

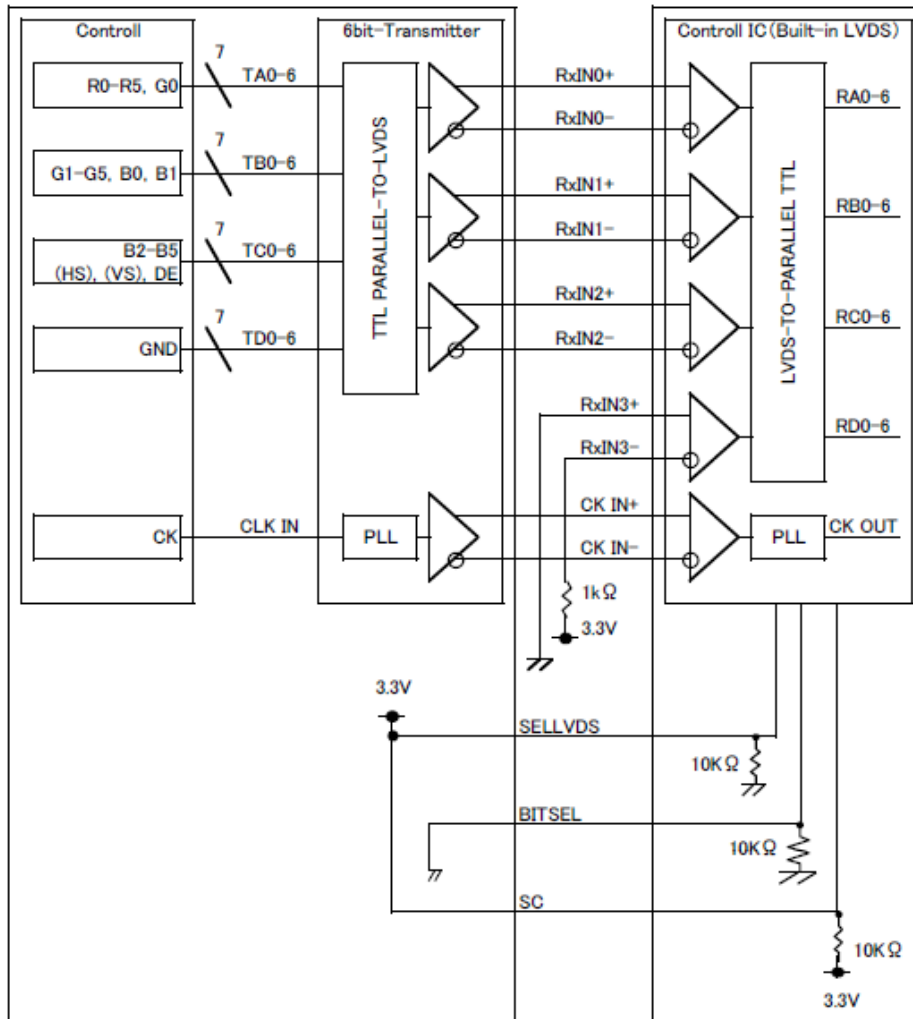

*SELLVDS and BITSEL signal lines have 10 k Ω pull-down resistor.

*SC signal line has 10 k Ω pull-up resistor.


7-3. Data mapping (8bit input / 8bit mode)

1) Location of BITSEL, SELLVDS (THC63LVDM83D (THine Electronics) or compatible)

Transmitter		1Pin BITSEL = "L" or OPEN 2Pin SELLVDS = "L" or OPEN	1Pin BITSEL = "L" or OPEN 2Pin SELLVDS = "H"
Pin No.	Data		
51	TA0	R0(LSB)	R2
52	TA1	R1	R3
54	TA2	R2	R4
55	TA3	R3	R5
56	TA4	R4	R6
3	TA5	R5	R7(MSB)
4	TA6	G0(LSB)	G2
6	TB0	G1	G3
7	TB1	G2	G4
11	TB2	G3	G5
12	TB3	G4	G6
14	TB4	G5	G7(MSB)
15	TB5	B0(LSB)	B2
19	TB6	B1	B3
20	TC0	B2	B4
22	TC1	B3	B5
23	TC2	B4	B6
24	TC3	B5	B7(MSB)
27	TC4	(HS)	(HS)
28	TC5	(VS)	(VS)
30	TC6	DE	DE
50	TD0	R6	R0(LSB)
2	TD1	R7(MSB)	R1
8	TD2	G6	G0(LSB)
10	TD3	G7(MSB)	G1
16	TD4	B6	B0(LSB)
18	TD5	B7(MSB)	B1
25	TD6	(NA)	(NA)

BITSEL=L(GND) or OPEN

SELLVDS=L(GND) or OPEN

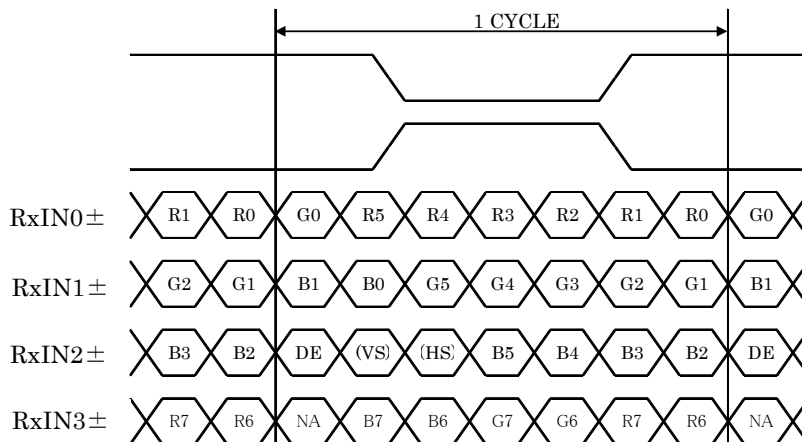


DE : DATA ENABLE

HS : H_{SYNC}

VS : V_{SYNC}


BITSEL=L(GND) or OPEN
SELLVDS=H(3.3V)

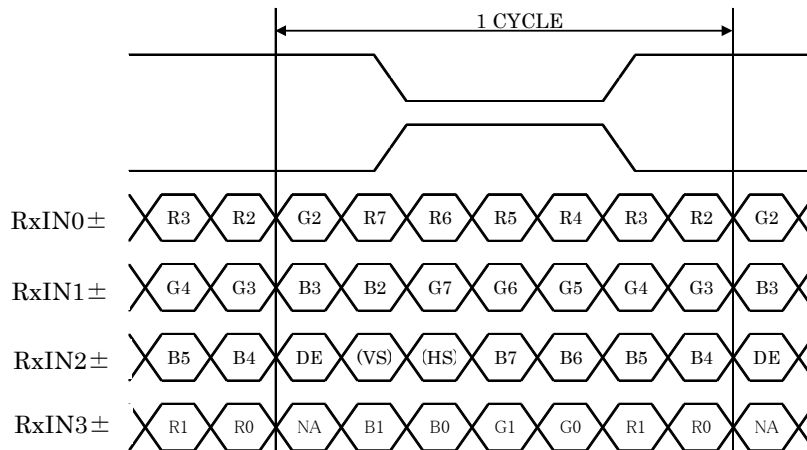

DE : DATA ENABLE
HS : H_{SYNC}
VS : V_{SYNC}

2) Block diagram


BITSEL=L(GND) or OPEN
SELLVDS=L(GND) or OPEN

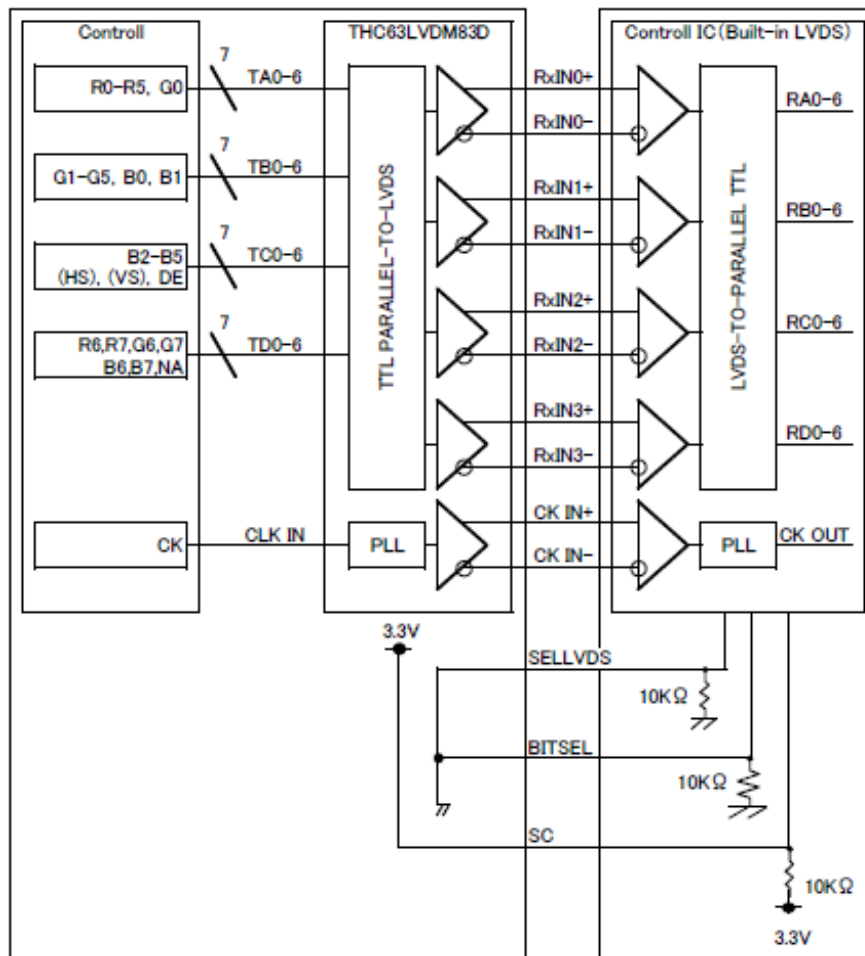

*SELLVDS and BITSEL signal lines have 10 k Ω pull-down resistor.

*SC signal line has 10 k Ω pull-up resistor.

BITSEL=L(GND) or OPEN
SELLVDS=H(3.3V)

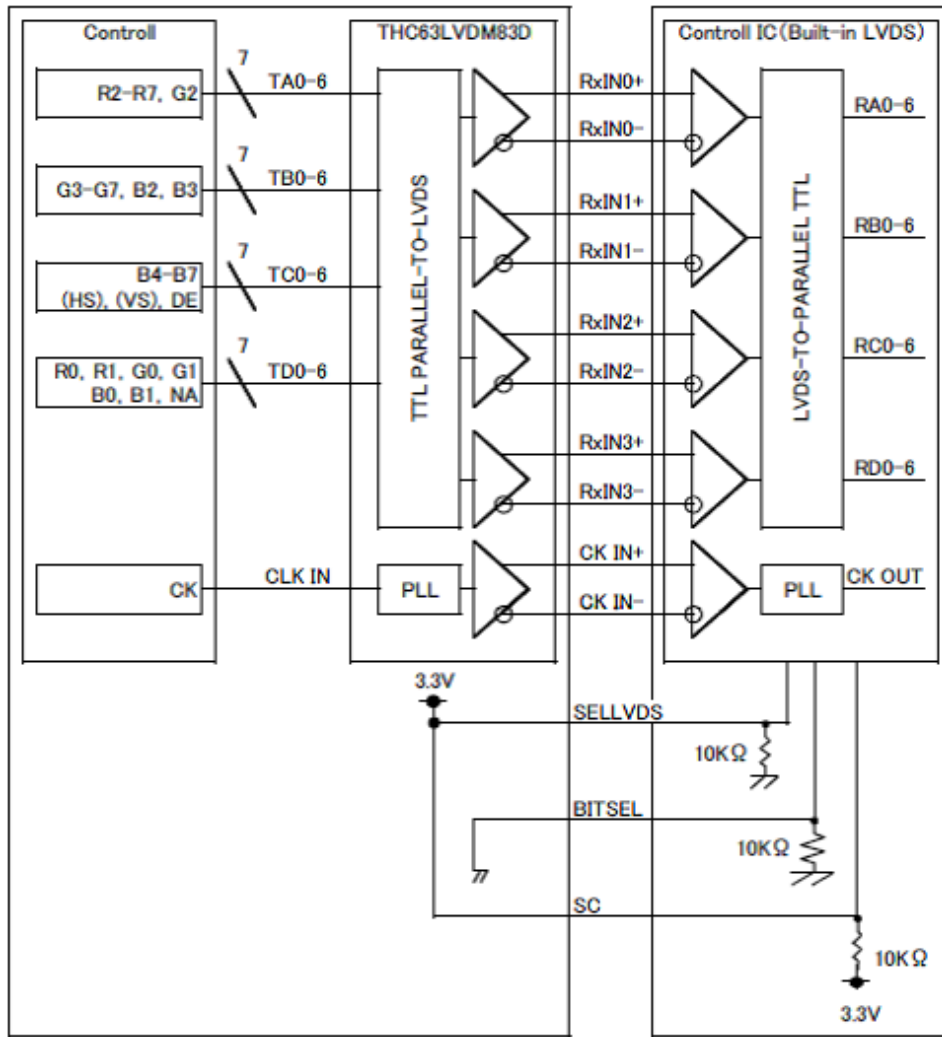

*SELLVDS and BITSEL signal lines have 10 k Ω pull-down resistor.

*SC signal line has 10 k Ω pull-up resistor.


7-4. Data mapping (6bit input / 6bit mode)

1) Location of BITSEL, SELLVDS (THC63LVDM83D (THine Electronics) or compatible)

Transmitter		1Pin BITSEL = "H" 2Pin SELLVDS = "L" or OPEN	1Pin BITSEL = "H" 2Pin SELLVDS = "H"
Pin No.	Data		
44	TA0	R0(LSB)	—
45	TA1	R1	—
47	TA2	R2	—
48	TA3	R3	—
1	TA4	R4	—
3	TA5	R5(MSB)	—
4	TA6	G0(LSB)	—
6	TB0	G1	—
7	TB1	G2	—
9	TB2	G3	—
10	TB3	G4	—
12	TB4	G5(MSB)	—
13	TB5	B0(LSB)	—
15	TB6	B1	—
16	TC0	B2	—
18	TC1	B3	—
19	TC2	B4	—
20	TC3	B5(MSB)	—
22	TC4	(HS)	—
23	TC5	(VS)	—
25	TC6	DE	—

BITSEL=H(3.3V)

SELLVDS=L(GND) or OPEN

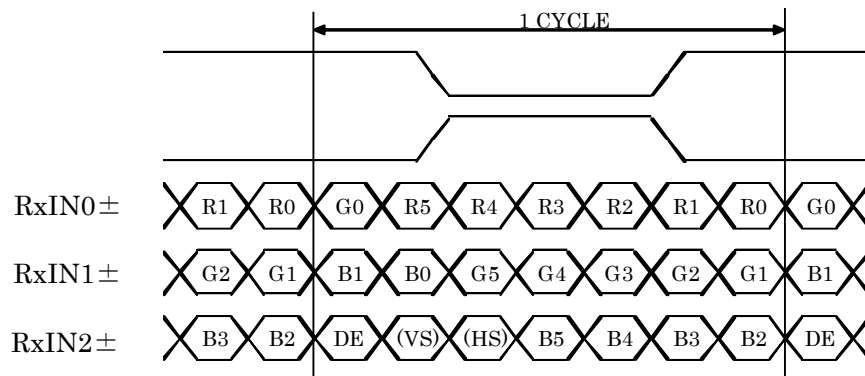

DE : DATA ENABLE


HS : H_{SYNC}

VS : V_{SYNC}

2) Block Diagram

BITSEL=H(3.3V)

SELLVDS=L(GND) or OPEN

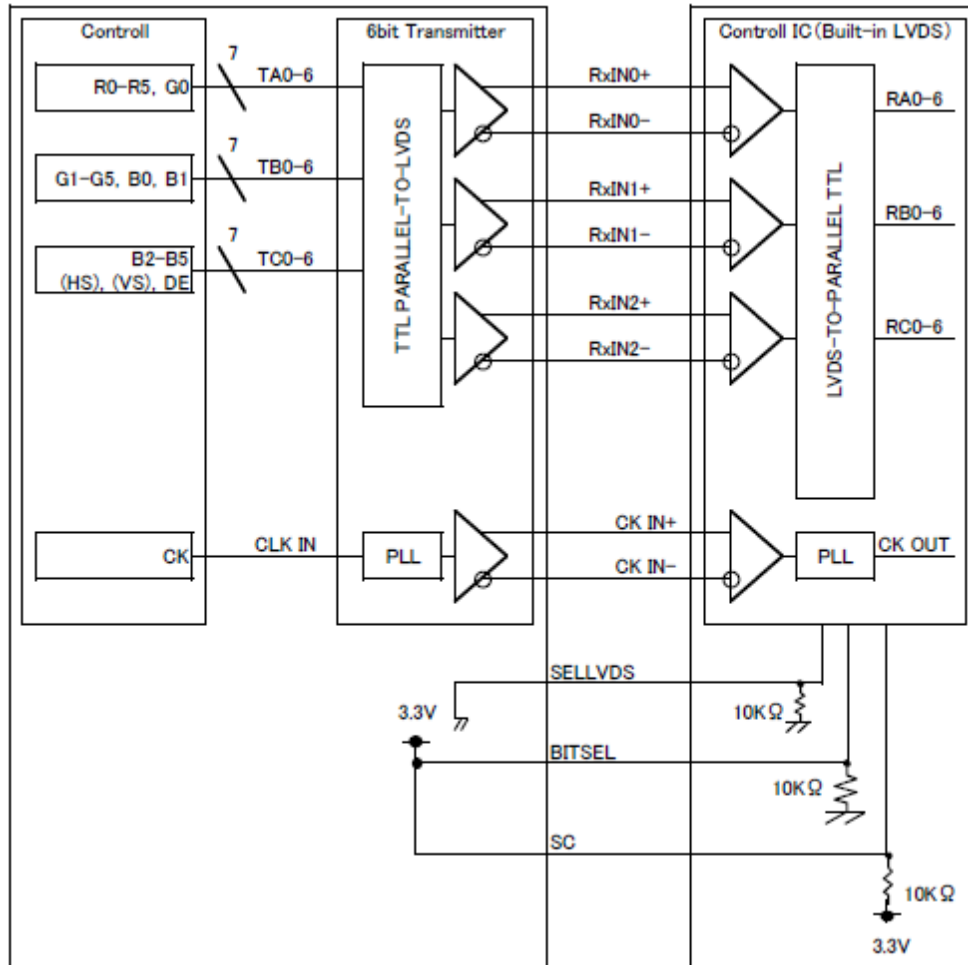

*SELLVDS and BITSEL signal lines have 10 k Ω pull-down resistor.

*SC signal line has 10 k Ω pull-up resistor.


8. Input timing characteristics

8-1. Timing characteristics


	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Clock (CK)	Frequency	1/Tc	29.88	33.2	36.52	MHz	1)
Enable signal (DE)	Horizontal Period	Th	1024	1056	1088	Tc	
			-	31.8	-	μs	2)
	Horizontal display period	Thd	800			Tc	
	Vertical Period	Tv	487	525	550	Th	
	Vertical display period	Tvd	480			Th	
Refresh rate		fv	50	60	70	Hz	3)

- 1) If the display is used under the condition which is out of specifications such as higher clock frequency than specified value, there is a possibility phenomenon such as display error including white display, malfunction and no image may occur. Please use the display under the conditions written in the specification.
- 2) Please set a clock frequency, a vertical dormant period, and the horizontal dormant period so that the Horizontal Period should not reach less than Min. value.
- 3) If the refresh rate reach less than Min. value, the deterioration of the display quality, flicker etc., may occur. ($fv=1/Tv$)


Vertical Timing Diagram

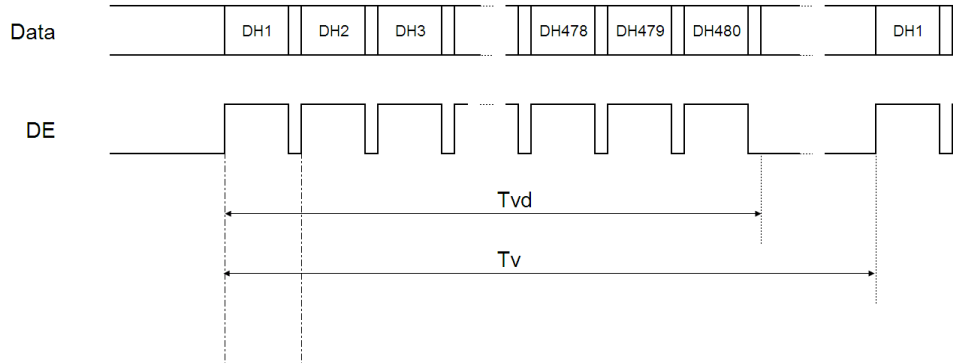

Horizontal Timing Diagram

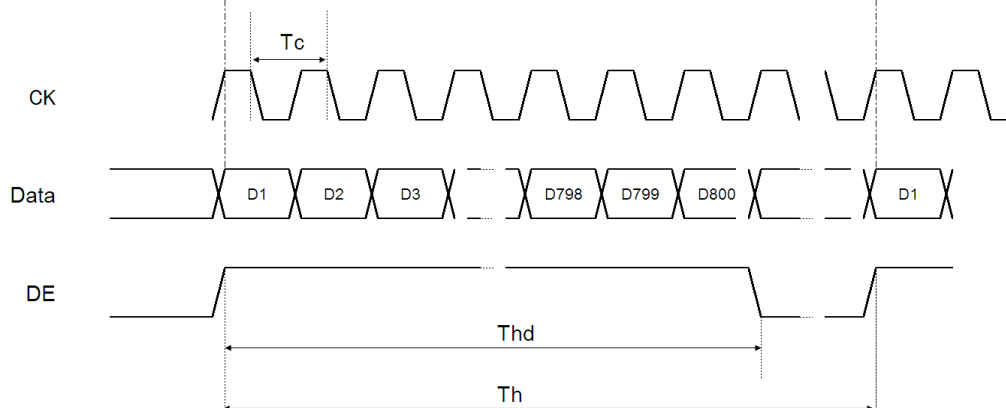

8-2. Input data signals and display position on the screen

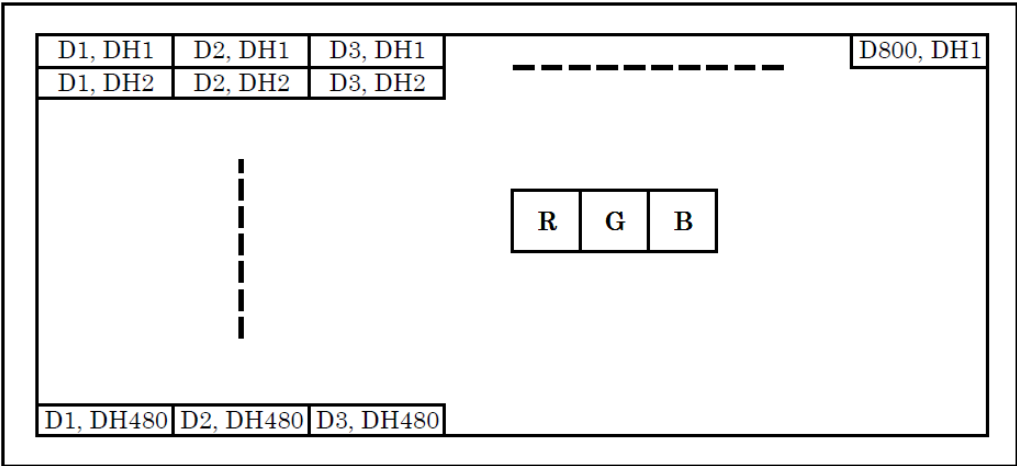

9. Lot number identification

The lot number shall be indicated on the back of the backlight case of each LCD.

附註: TCG070WVLDEDNN-AN30: □□ - □□ □□ MADE IN □□

↓ ↓ ↓ ↓ ↓ ↓

① ② ③ ④ ⑤ ⑥

- No① – No⑥ above indicate

- ① Data matrix (For internal control purpose only)
- ② Year code (The last digit of the year)
- ③ Month code
- ④ Day code
- ⑤ Version number (Max. 7 characters)
- ⑥ Country of origin

③ Month code

Month	Jan.	Feb.	Mar.	Apr.	May	Jun.
Code	1	2	3	4	5	6

Month	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
Code	7	8	9	X	Y	Z

10. Warranty

10-1. Incoming inspection

Please inspect the LCD within one month after your receipt.

10-2. Production warranty

Kyocera warrants the LCD for a period of 12 months from the ship date. Kyocera shall, by mutual agreement, replace or re-work defective LCD that is to be Kyocera's responsibility.

11. Precautions for use

11-1. Installation of the LCD

- 1) A transparent protection plate shall be added to protect the LCD and its polarizer.
- 2) The LCD shall be installed so that there is no pressure on the LSI chips.
- 3) The LCD shall be installed flat, without twisting or bending.
- 4) A transparent protection sheet is attached to the polarizer. Please remove the protection film slowly before use, paying attention to static electricity.
- 5) Please design the housing window so that its edges are between the active area and the effective area of the LCD screen.

11-2. Static electricity

- 1) Since CMOS ICs are mounted directly onto the LCD glass, protection from static electricity is required.
- 2) Workers should use body grounding. Operator should wear ground straps.

11-3. LCD operation

- 1) The LCD shall be operated within the limits specified. Operation at values outside of these limits may shorten life, and/or harm display images.
- 2) Please select the best display pattern based on your evaluation because flicker, lines or nonuniformity or unevenness can be visible depending on display patterns.

11-4. Storage

- 1) The LCD shall be stored within the temperature and humidity limits specified.
Store in a dark area, and protect the LCD from direct sunlight or fluorescent light.
- 2) Always store the LCD so that it is free from external pressure onto it.


11-5. Usage

- 1) **DO NOT** store in a high humidity environment for extended periods. Polarizer degradation bubbles, and/or peeling off of the polarizer may result.
- 2) The front polarizer is easily scratched or damaged. Prevent touching it with any hard material, and from being pushed or rubbed.
- 3) The LCD screen may be cleaned by wiping the screen surface with a soft cloth or cotton pad using a little Ethanol.
- 4) Water may cause damage or discoloration of the polarizer. Clean condensation or moisture from any source immediately.
- 5) Always keep the LCD free from condensation during testing. Condensation may permanently spot or stain the polarizer.
- 6) Do not disassemble LCD because it will result in damage.
- 7) This Kyocera LCD has been specifically designed for use in general electronic devices, but not for use in a special environment such as usage in an active gas. Hence, when the LCD is supposed to be used in a special environment, evaluate the LCD thoroughly beforehand and do not expose the LCD to chemicals such as an active gas.
- 8) Please do not use solid-base image pattern for long hours because a temporary afterimage may appear. We recommend using screen saver etc. in cases where a solid-base image pattern must be used.
- 9) Liquid crystal may leak when the LCD is broken. Be careful not to let the fluid go into your eyes and mouth. In the case the fluid touches your body; rinse it off right away with water and soap.

12. Reliability test data

Test item	Test condition	Test time	Judgement
High temp. atmosphere	80°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect
Low temp. atmosphere	-30°C	240h	Display function : No defect Display quality : No defect Current consumption : No defect
High temp. humidity atmosphere	40°C 90% RH	240h	Display function : No defect Display quality : No defect Current consumption : No defect
Temp. cycle	-30°C 0.5h R.T. 0.5h 80°C 0.5h	10cycles	Display function : No defect Display quality : No defect Current consumption : No defect
High temp. operation	70°C	500h	Display function : No defect Display quality : No defect Current consumption : No defect

- 1) Each test item uses a test LCD only once. The tested LCD is not used in any other tests.
- 2) The LCD is tested in circumstances in which there is no condensation.
- 3) The reliability test is not an out-going inspection.
- 4) The result of the reliability test is for your reference purpose only.
The reliability test is conducted only to examine the LCD's capability.

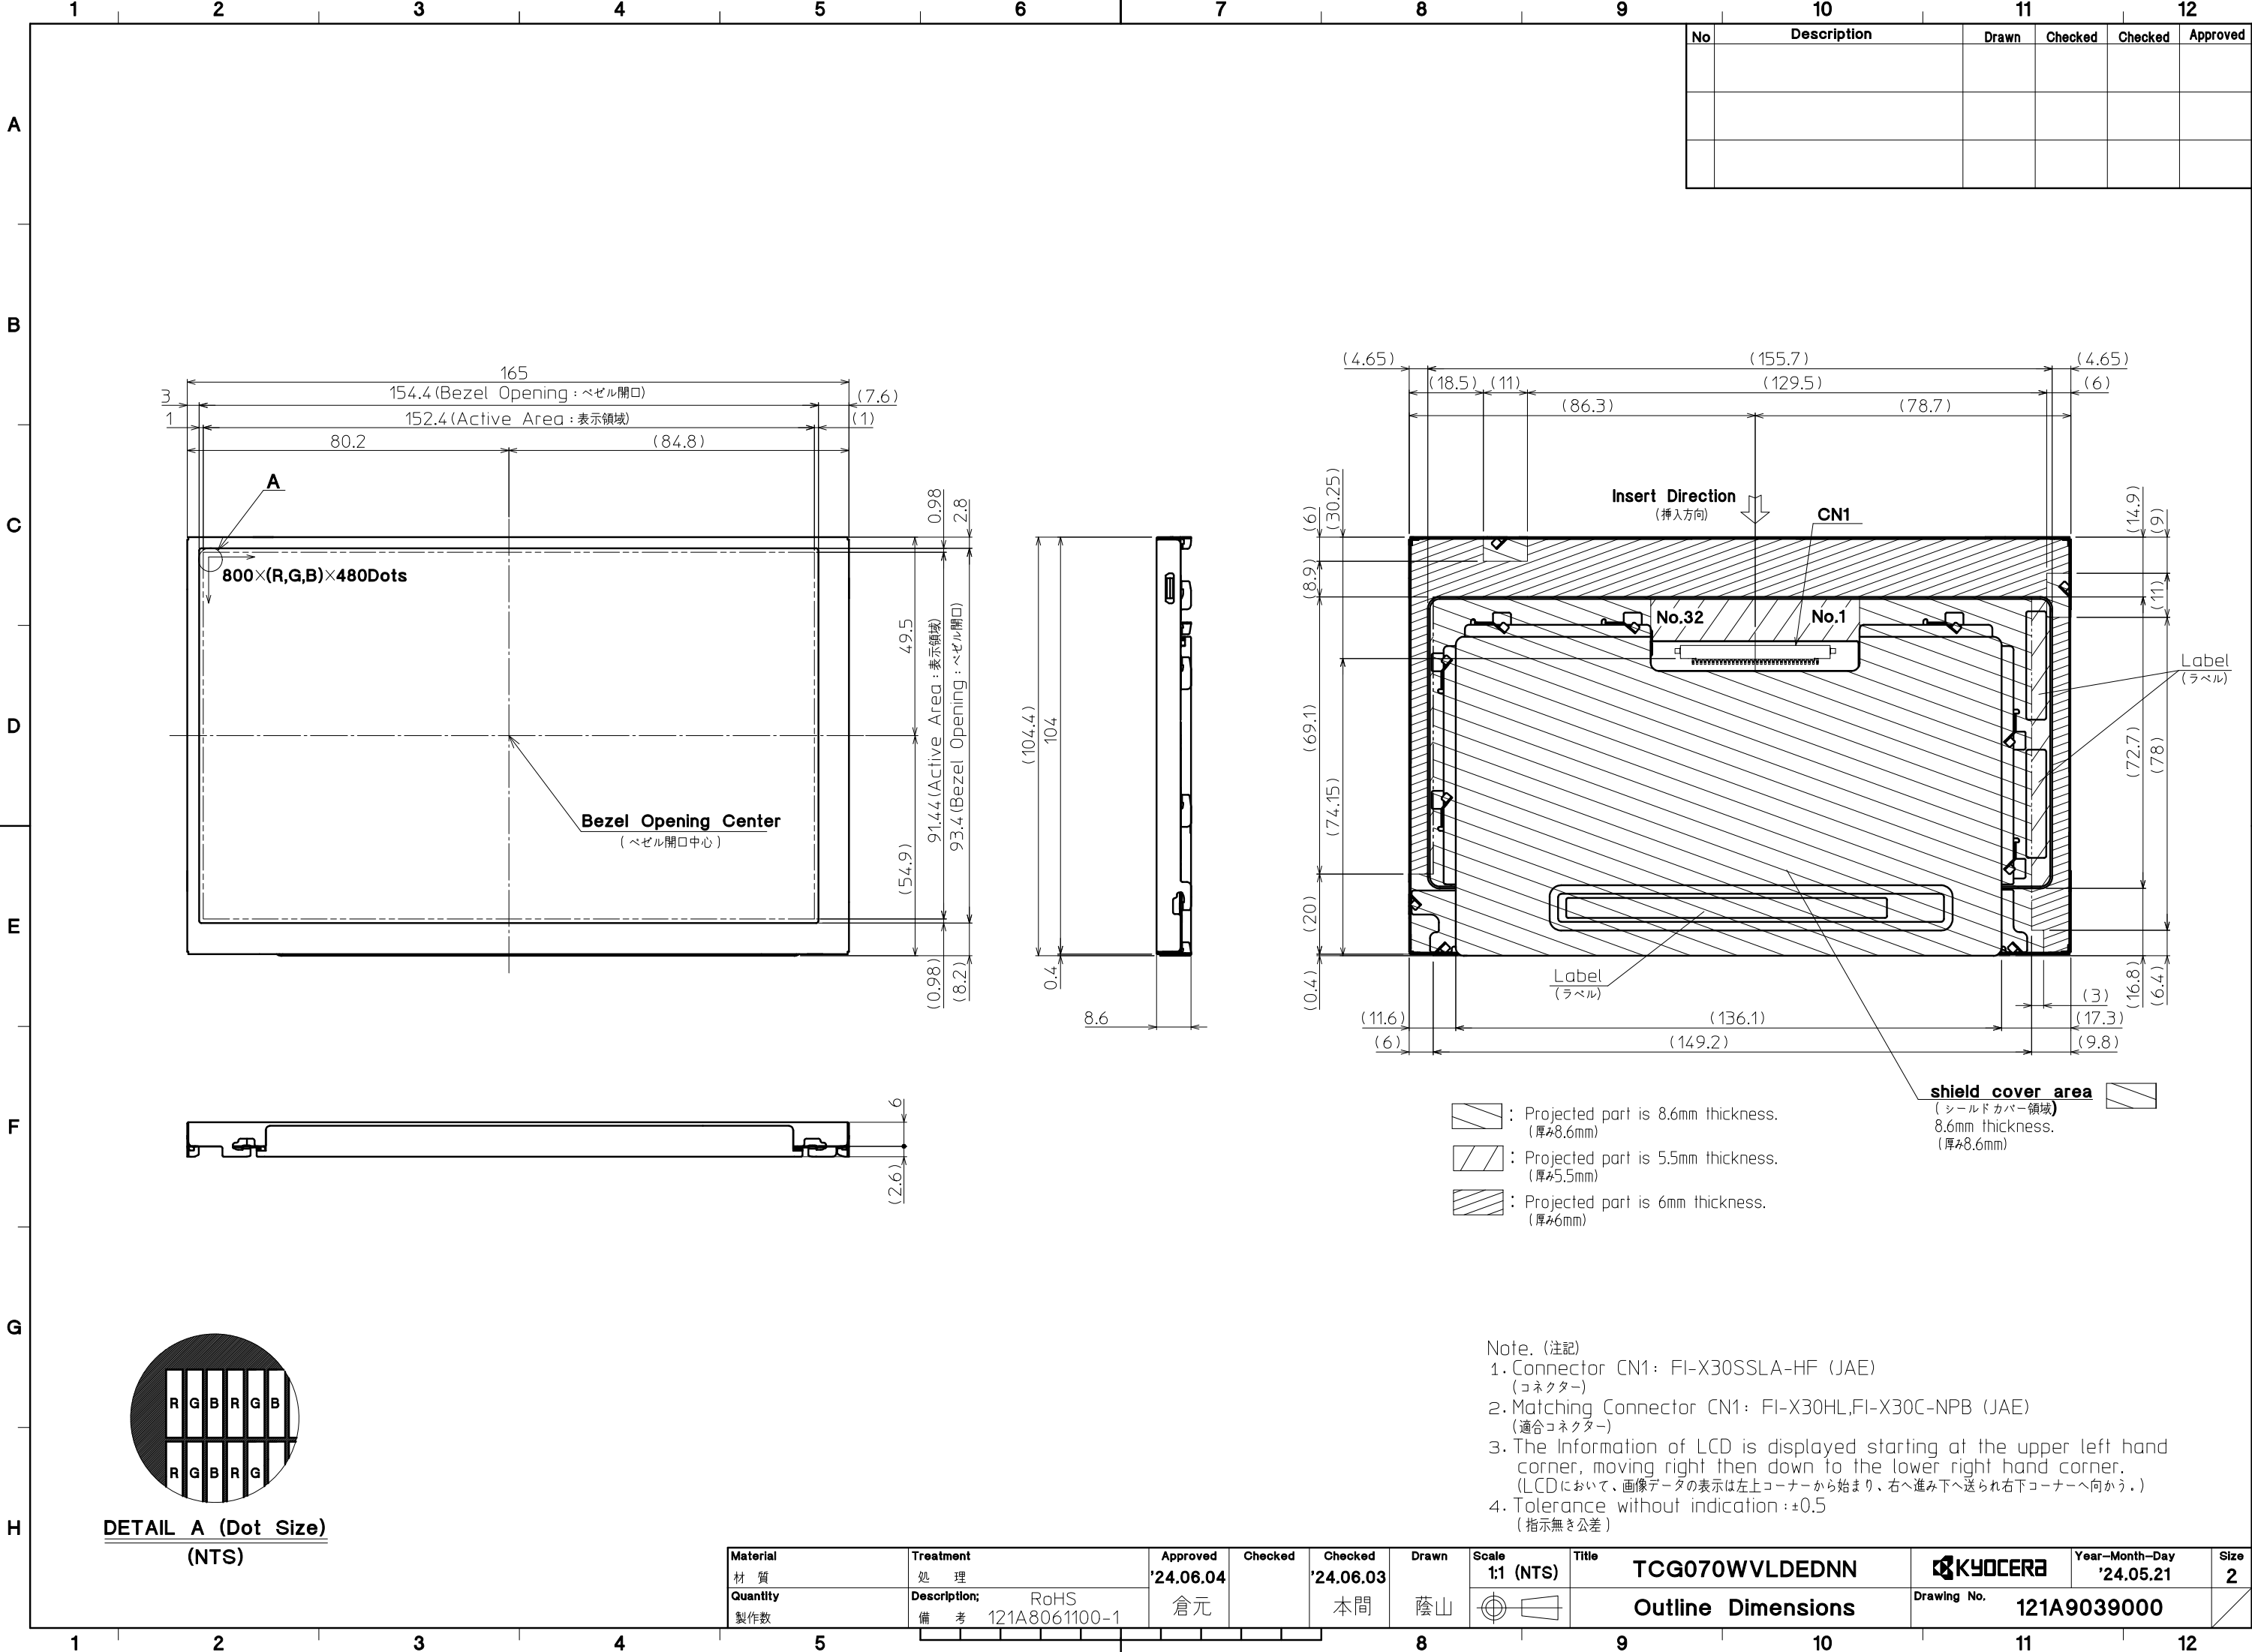

No	Description	Drawn	Checked	Checked	Approved

Note. (注記)

- Connector CN1: FI-X30SSLA-HF (JAE)
(コネクター)
- Matching Connector CN1: FI-X30HL,FI-X30C-NPB (JAE)
(適合コネクター)
- The Information of LCD is displayed starting at the upper left hand corner, moving right then down to the lower right hand corner.
(LCDにおいて、画像データの表示は左上コーナーから始まり、右へ進み下へ送られ右下コーナーへ向かう。)
- Tolerance without indication : ±0.5
(指示無公差)

Material 材質	Treatment 処理	Approved '24.06.04	Checked	Checked '24.06.03	Drawn	Scale 1:1 (NTS)	Title TCG070WVLDEDNN	KYOCERA	Year-Month-Day '24.05.21	Size 2
Quantity 製作数	Description; 備考	RoHS 121A8061100-1	倉元	本間	蔭山		Outline Dimensions	Drawing No. 121A9039000		

Spec No.	TQ3C-8EAF0-E2YAA384-00
Date	September 4, 2024

KYOCERA INSPECTION STANDARD

TYPE : TCG070WVLDDEDNN-AN30

KYOCERA CORPORATION

Original Issue Date	Designed by: Engineering dept.			Confirmed by: QA dept.
	Prepared	Checked	Approved	Approved
September 4, 2024	<i>Y. Yamazaki</i>	<i>T. Fukui</i>	<i>M. Kato</i>	<i>T. Sawada</i>

Spec No.

TQ3C-8EAF0-E2YAA384-00

Part No.

TCG070WVLDEDNN-AN30

Page





-

Revision record

Date		Designed by : Engineering dept.			Confirmed by : QA dept.
		Prepared	Checked	Approved	Approved
Rev. No.	Date	Page	Descriptions		

Visuals specification

1) Note

	Note		
General	- Customer identified anomalies not defined within this inspection standard shall be reviewed by Kyocera, and an additional standard shall be determined by mutual consent. - This inspection standard about the image quality shall be applied to any defect within the active area and shall not be applicable to outside of the area. - Inspection conditions - Luminance : 500 Lux min. - Inspection distance : 300 mm. - Temperature : $25 \pm 5^{\circ}\text{C}$ - Direction : Directly above		
Definition of inspection item	Dot defect	Bright dot defect	The dot is constantly “on” when power applied to the LCD, even when all “Black” data sent to the screen. Inspection tool: 5% Transparency neutral density filter. Count dot: If the dot is visible through the filter. Don't count dot: If the dot is not visible through the filter. 
		Black dot defect	The dot is constantly “off” when power applied to the LCD, even when all “White” data sent to the screen. Similar size compared to bright dot.
		White dot (Circular/foreign particle)	Pixel works electrically, however, circular/foreign particle makes dot appear to be “on” even when all “Black” data is sent to the screen.
		Adjacent dot	Adjacent dot defect is defined as two or more bright dot defects or black dot defects. 
	External inspection	Bubble, Scratch, Foreign particle (Polarizer, Cell, Backlight)	Visible operating (all pixels “Black” or “White”) and non operating.
		Appearance inspection	Does not satisfy the value at the spec.
	Definition of size	Definition of circle size  a: major axis, b: minor axis $d = (a + b) / 2$ Definition of linear size 	

2) Standard

Classification		Inspection item		Judgement standard																
Defect (in LCD glass)	Single dot	Bright dot defect		Acceptable number	: 4															
				Bright dot spacing	: 5 mm or more															
	Adjacent dot	Black dot defect		Acceptable number	: 5															
		2 dots	Bright dot defect	Black dot spacing		: 5 mm or more														
			Black dot defect	Acceptable number		: 3														
		3 or more dots		Acceptable number	: 0															
	Total dot defects		Acceptable number		: 5 Max															
	Others	White dot, Dark dot (Circle)		<table><tr><td>Size (mm)</td><td>Acceptable number</td></tr><tr><td>d ≤ 0.2</td><td>(Neglected)</td></tr><tr><td>0.2 < d ≤ 0.4</td><td>5</td></tr><tr><td>0.4 < d ≤ 0.5</td><td>3</td></tr><tr><td>0.5 < d</td><td>0</td></tr></table>		Size (mm)	Acceptable number	d ≤ 0.2	(Neglected)	0.2 < d ≤ 0.4	5	0.4 < d ≤ 0.5	3	0.5 < d	0					
Size (mm)	Acceptable number																			
d ≤ 0.2	(Neglected)																			
0.2 < d ≤ 0.4	5																			
0.4 < d ≤ 0.5	3																			
0.5 < d	0																			
External inspection (Defect on Polarizer or between Polarizer and LCD glass)	Polarizer (Scratch)	<table><tr><td>Width (mm)</td><td>Length (mm)</td><td>Acceptable number</td></tr><tr><td>W ≤ 0.1</td><td>—</td><td>(Neglected)</td></tr><tr><td rowspan="2">0.1 < W ≤ 0.3</td><td>L ≤ 5.0</td><td>(Neglected)</td></tr><tr><td>5.0 < L</td><td>0</td></tr><tr><td>0.3 < W</td><td>—</td><td>0</td></tr></table>				Width (mm)	Length (mm)	Acceptable number	W ≤ 0.1	—	(Neglected)	0.1 < W ≤ 0.3	L ≤ 5.0	(Neglected)	5.0 < L	0	0.3 < W	—	0	
		Width (mm)	Length (mm)	Acceptable number																
		W ≤ 0.1	—	(Neglected)																
		0.1 < W ≤ 0.3	L ≤ 5.0	(Neglected)																
			5.0 < L	0																
	0.3 < W	—	0																	
	Polarizer (Bubble)	<table><tr><td>Size (mm)</td><td>Acceptable number</td></tr><tr><td>d ≤ 0.2</td><td>(Neglected)</td></tr><tr><td>0.2 < d ≤ 0.3</td><td>5</td></tr><tr><td>0.3 < d ≤ 0.5</td><td>3</td></tr><tr><td>0.5 < d</td><td>0</td></tr></table>				Size (mm)	Acceptable number	d ≤ 0.2	(Neglected)	0.2 < d ≤ 0.3	5	0.3 < d ≤ 0.5	3	0.5 < d	0					
		Size (mm)	Acceptable number																	
		d ≤ 0.2	(Neglected)																	
		0.2 < d ≤ 0.3	5																	
		0.3 < d ≤ 0.5	3																	
	0.5 < d	0																		
	Foreign particle (Circular shape)	<table><tr><td>Size (mm)</td><td>Acceptable number</td></tr><tr><td>d ≤ 0.2</td><td>(Neglected)</td></tr><tr><td>0.2 < d ≤ 0.4</td><td>5</td></tr><tr><td>0.4 < d ≤ 0.5</td><td>3</td></tr><tr><td>0.5 < d</td><td>0</td></tr></table>				Size (mm)	Acceptable number	d ≤ 0.2	(Neglected)	0.2 < d ≤ 0.4	5	0.4 < d ≤ 0.5	3	0.5 < d	0					
		Size (mm)	Acceptable number																	
		d ≤ 0.2	(Neglected)																	
0.2 < d ≤ 0.4		5																		
0.4 < d ≤ 0.5		3																		
0.5 < d	0																			
Foreign particle (Linear shape) Scratch	<table><tr><td>Width (mm)</td><td>Length (mm)</td><td>Acceptable number</td></tr><tr><td>W ≤ 0.03</td><td>—</td><td>(Neglected)</td></tr><tr><td rowspan="3">0.03 < W ≤ 0.1</td><td>L ≤ 2.0</td><td>(Neglected)</td></tr><tr><td>2.0 < L ≤ 4.0</td><td>3</td></tr><tr><td>4.0 < L</td><td>0</td></tr><tr><td>0.1 < W</td><td>—</td><td>(According to circular shape)</td></tr></table>				Width (mm)	Length (mm)	Acceptable number	W ≤ 0.03	—	(Neglected)	0.03 < W ≤ 0.1	L ≤ 2.0	(Neglected)	2.0 < L ≤ 4.0	3	4.0 < L	0	0.1 < W	—	(According to circular shape)
	Width (mm)	Length (mm)	Acceptable number																	
	W ≤ 0.03	—	(Neglected)																	
	0.03 < W ≤ 0.1	L ≤ 2.0	(Neglected)																	
		2.0 < L ≤ 4.0	3																	
4.0 < L		0																		
0.1 < W	—	(According to circular shape)																		
Color variation (Mura)		Not to be significantly visible. Consultation shall be held as necessary.																		