



**Fuse Holders for VC, VR10, PV, VGC**

**Basic Information:**



Products Pic.	Catalog Numbers	Voltage Rating	Current Rating(A)	Withstand Voltage	Fuse sizes (mm)	Number of Poles	Weight & Packaging (g)	Notes
	VCB10-30	1000VDC	30(UL) 32(IEC)	3000V AC	10×38	1 1+ N 2 3 3+N	59	Holder with the same dimensions for class CC is optional
	VCB10-30L	1000V DC				1 1+ N 2 3 3+N		

- Notes: L (WITH LED)
- a. Storage temperature: -40to +70
  - b. Storage humidity: 5 % to 90%
  - c. Work temperature: -40to +125
  - d. For indoor use
  - e. Do not operate under load
  - f. Screw tightening moment(m4):1.5Nm~1.8Nm
  - g. Connection Capcity:(solid wire)1.5~25mm<sup>2</sup>

**Mechanical Dimensions: (tolerances:±2mm)**

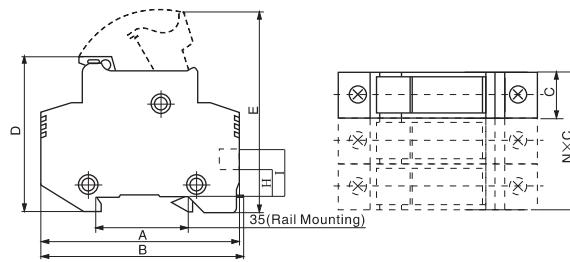


Fig.1

Catalog Numbers	Ref. Fig	Current Rating(A)	Mechanical Dimensions(mm)								
			A±2	B±2	C±1	D±1	E(Ref)	F±0.5	G±0.5	H±0.5	I±0.5
VCB10-30/VCB10-30L	1	30(UL) 32(IEC)	76.5	78.7	17.5	58	78.5	-	-	8.27	17.40