



### Key Features

<b>EPIC® Seal</b>	Ceramic to metal braze. Gas filled hermetic chamber protects key components. Exceeds IP69K standard
<b>Temperature</b>	Tested to temperatures up to 200°C
<b>Contacts / Form</b>	Silver / SPST / NC
<b>Coil</b>	Efficient two coil design with no PWM or EMI emissions. Coil suppression built in
<b>High Shock and Vibration</b>	For rugged environments, off-road and tracked vehicles
<b>Installation</b>	Not direction sensitive
<b>Made in USA</b>	Designed and manufactured in the USA
<b>Reference</b>	MIL-R-6106, RoHS

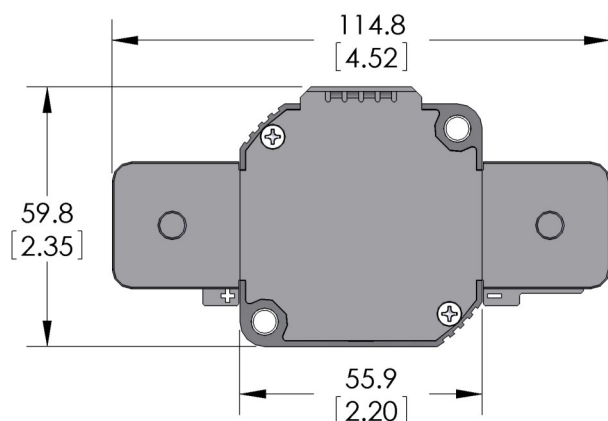

Current Carry vs Time  
with 85°C terminal temperature rise


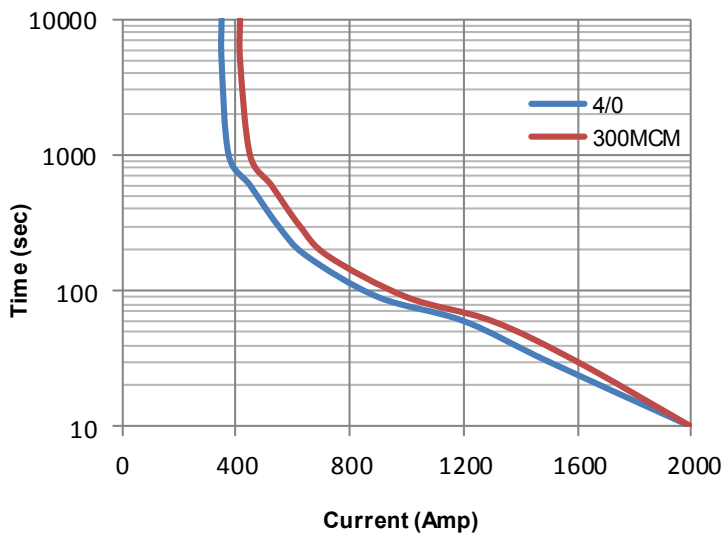



#### Power Terminals


Stainless M10 X 1.5 Bolt  
Stainless M10 X 1.5 Nut  
Stainless Lock Washer  
Stainless Flat Washer  
Torque 14-20 Nm [125-175 in-lb]

#### Mounting Hardware

M5 [No. 10] Bolts (not incl.)  
Torque 2-4 Nm [18-35 in-lb]

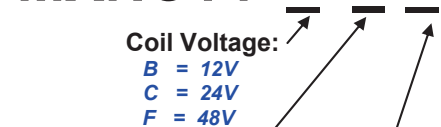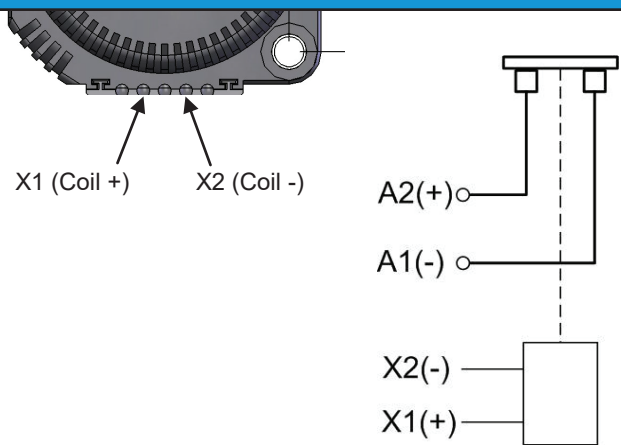Technical Specification		Ordering Key	
Continuous Current	400A w/ 300MCM (see graph on reverse)	<div>MXNC14</div>  <p><b>Coil Voltage:</b>  <i>B = 12V</i>  <i>C = 24V</i>  <i>F = 48V</i></p> <p><b>Coil Wire:</b>  <i>A = 38 cm (15 in)</i>  <i>B = 61 cm (24 in)</i>  <i>C = 122 cm (48 in)</i></p> <p><b>Auxiliary Contacts:</b>  <i>X = none</i>  <i>B = SPST, Normally Open</i>  <i>C = SPST, Normally Closed</i></p>	
Max Current—1 sec	3000A		
Max Current—10 sec	2000A		
Max Current—90 sec	1000A		
Contact Voltage Drop (max)	150mV at 400A		
Insulation Resistance (min)	100MΩ (50MΩ after life)	<div>Power Circuit and Installation</div> 	
Dielectric Withstanding	1500VRMS (1050 VRMS after life)		
Operate Time (max)	20 msec (include bounce)		
Release Time (max)	12 msec		
Weight	1.1 lb with hardware (500 grams)		
Resistive Load Switching			
400A at 24 VDC	100,000 cycles		
Mechanical Life	300,000 cycles		
Fault Interrupt @ 28VDC	3000A		
Environmental Specifications			
Seal	Hermetic, 10 E-9 atm cc/sec		
Temperature Range	-55°C to +100°C		
Shock	Sawtooth @ 20G, 11ms, ½ Sine @ 25G, 11ms		
Vibration	10-2000 Hz, 20G		
Water / Steam	2750 psi waterjet, 105 psi steam, boiling water		
Salt Spray Corrosion	MIL-STD-810G		
Resistant to corrosion, chemicals, and fungal growth			

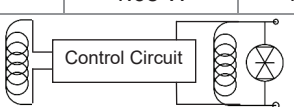Coil Data			
*Contact factory for additional coil voltages			
Coil Part #	B	C	F
Nominal Voltage	12 VDC	24 VDC	48 VDC
Max Voltage	16 VDC	32 VDC	60 VDC
Pickup Voltage (max)	8 VDC	16 VDC	32 VDC
Dropout Voltage	0.2 to 4 VDC	0.5 to 10 VDC	1 to 20 VDC
Pull-in Current ( max 75ms)	4.2 A	1.6 A	0.8 A
Coil Current (Amps)	0.15 A	0.07 A	0.035 A
Coil Power (Watts)	1.8 W	1.68 W	1.68 W
Internal Coil Suppression (Transorb)			
Coil Back EMF	55 V		125 V

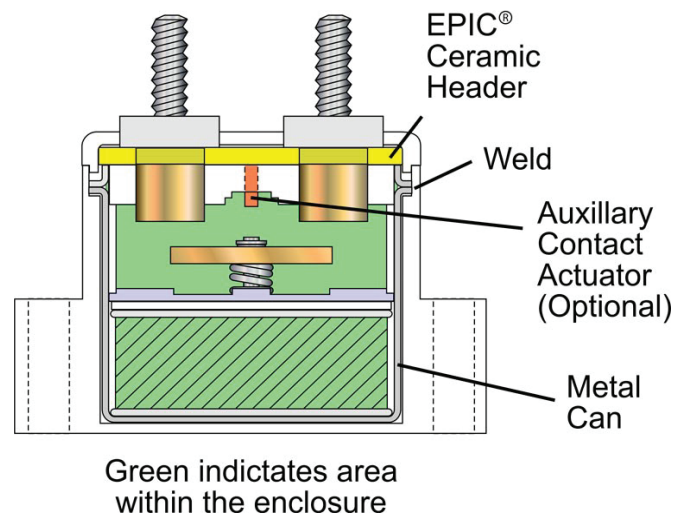

Options and Accessories	

		P.O. Box 4428 Santa Barbara, CA 93140
<a href="http://www.gigavac.com">www.gigavac.com</a>	<a href="mailto:info@gigavac.com">info@gigavac.com</a>	+805-684-8401
9-nov-21	© 2013 GIGAVAC, LLC	Page 2 of 2 <b>MXNC14</b>

---

Datasheets provided by Sensata Technologies, Inc., its subsidiaries and/or affiliates ("Sensata") are solely intended to assist third parties ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, valuation, and judgment in designing Buyer's systems and products. Sensata datasheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular datasheet. Sensata may make corrections, enhancements, improvements, and other changes to its datasheets or components without notice.

Buyers are authorized to use Sensata datasheets with the Sensata component(s) identified in each particular datasheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATASHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATASHEETS OR USE OF THE DATASHEETS, EXPRESS, IMPLIED, OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATASHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com). SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY, AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA

## CONTACT US

### Regional head offices:

#### United States of America

Sensata Technologies

Attleboro, MA

**Phone:** 508-236-3800

**E-mail:** [support@sensata.com](mailto:support@sensata.com)

#### Netherlands

Sensata Technologies Holland B.V.

Hengelo

**Phone:** +31 74 357 8000

**E-mail:** [support@sensata.com](mailto:support@sensata.com)

#### China

Sensata Technologies China Co., Ltd.

Shanghai

**Phone:** +8621 2306 1500

**E-mail:** [support@sensata.com](mailto:support@sensata.com)

Copyright © 2023 Sensata Technologies, Inc.